

Super Slim LED High Bay Light

Model : GK03125

Power adjustable: 80W-100W-120W-150W



Suzhou Jolighting Co.Ltd



Specification

Model	NS-GK03125			
Input Voltage	110-277Vac			
Power	80W-100W-120W-150W			
Power Factor	>0.96			
Led Chip	2835/3030			
Luminous Efficiency	*80W-170LM/W *100W-166LM/W *120W-159LM/W * 150W-151LM/W			
Luminous flux	*80W-13600LM	*100W-16600LM	*120W-19080LM	*150W-22650LM
Color Temp.	Customized			
Beam Angle	110°			
LM80	>36,000hrs			
CRI	70+			
Working Temp	-30-40℃			
IP Rating	IP66			
Driver Efficiency	96%			
Surge Protection	4KV/4KV			
Life Span	60000hrs			
Warranty	5 Years			
IK Rating	IK08			



Features


With driver built-in design, it is much more slimmer.



Compared with the original driver installation on the heat sink, the driver install on the side of the heat sink is much better.

- 1. Compared with the traditional led high bay light which the driver installed above, the height is reduced, container loading and transporation and storage can be saved about 3/5 volume.
- 2. 60% sea freight can be saved for a container.
- 3. 60% storage fee can be saved for a container.
- 4. 60% inland transportation cost can be saved for a container.

Model	D	Height H1	Height H2	Weight
NS-GK03125	φ240mm/9.4in	53mm/2.1in	96mm/3.8in	1.8kg

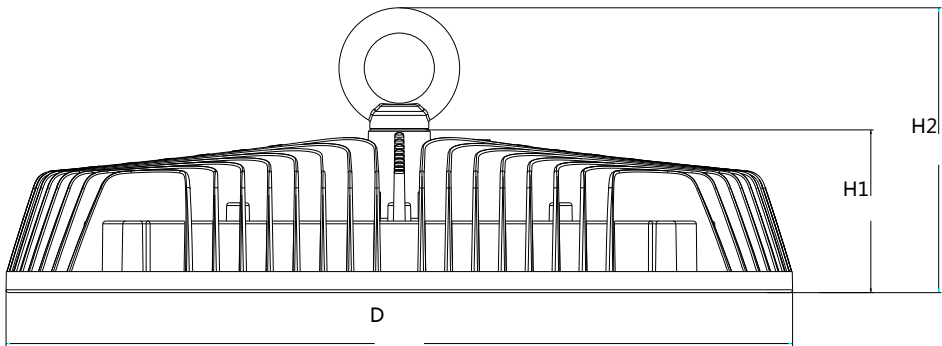



Features

1. Black/white optional
2. Adopt high quality magnesium alloy, heat dissipation is faster.
3. Adopt air fluid design, the heat dissipation is better.
4. Wattage adjustable: 80W-100W-120W-150W
5. Reduce SKUs



High Quality Magnesium Alloy Faster Heat Dissipation

Adopt high quality magnesium alloy, heat dissipation is faster.
Comply with heat dissipation of air fluid, better heat dissipation effect with greater heat dissipation area.








Comprehensive Details



We are committed to providing an integrated design to maximize product reliability so that it can work in extreme environments.

- Beam Angle 110°

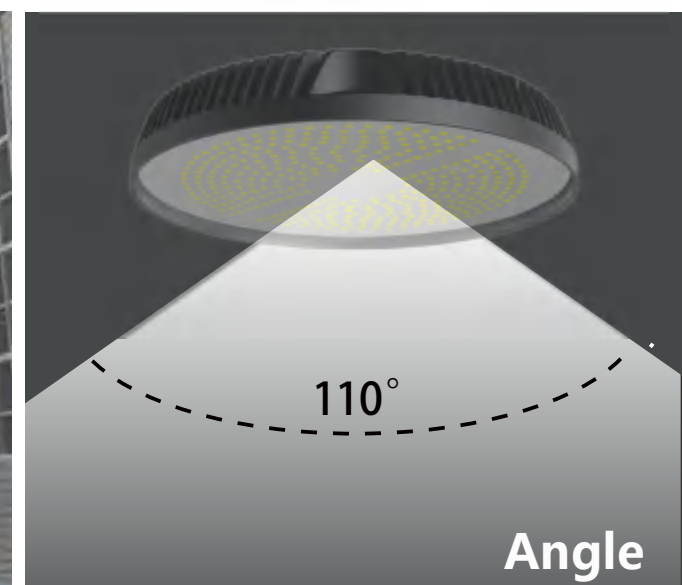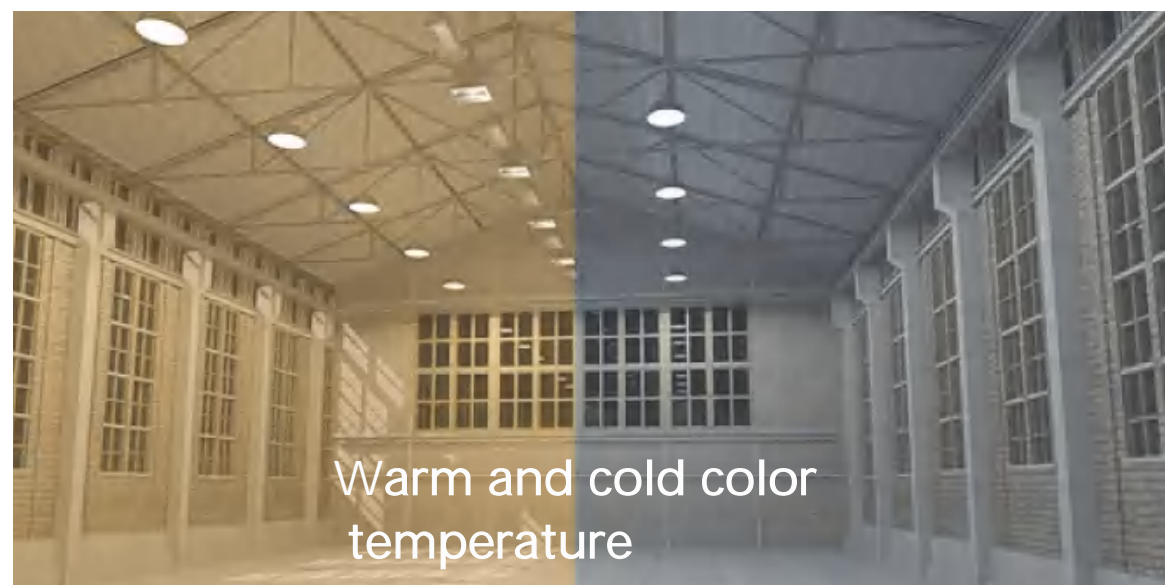

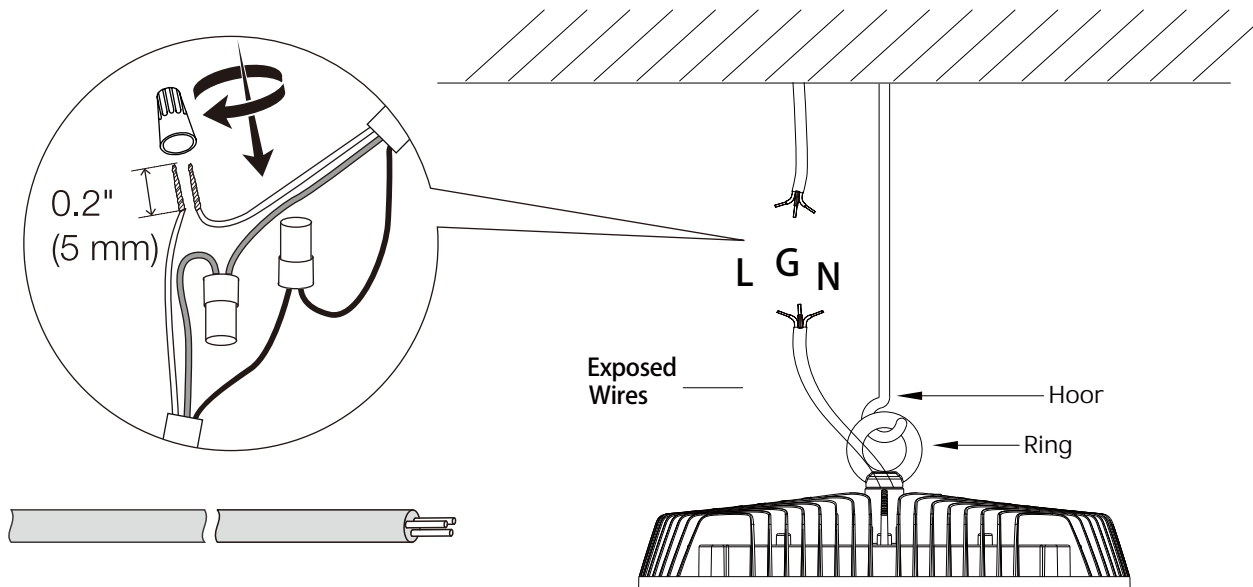

Wire method:

Easy Installation


Easy installtion and operation.
Multiple installation methods, suitable for various occasions.
Don't turn on the power before installation is completed.



Package

Each fixture is individually Packed

Model	NS-GK03125
Packing size	265*265*315mm
Weight	10KG /5PCS
Loading quantity	20GP 6305PCS 40HC 14560PCS

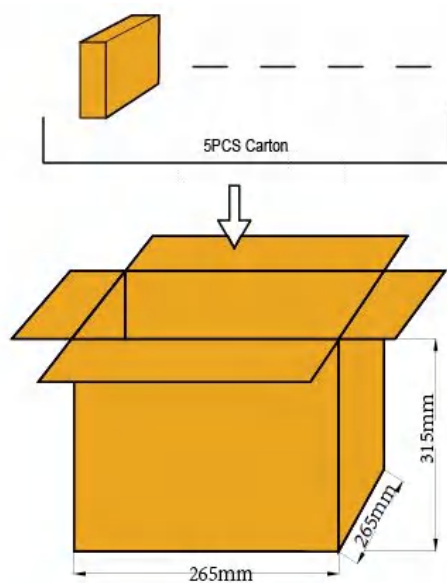

NS-GK03124-80/100/150